

# Calza trecciata / Guaina spiralata

## CALZA TRECCIATA IN POLIESTERE

Autoestinguente , UL-V2 , nera o grigia (V0 a richiesta)

### Caratteristiche principali:

1. Autoestinguente
2. Temperatura di utilizzo  $-70^{\circ}\text{C} - +150^{\circ}\text{C}$
3. Punto di fusione  $250^{\circ}\text{C}$
4. Rapporto di allargamento 1:2
5. Assorbimento d'acqua in 24 h: 0.08%

Codice	Ø guaina mm	Ø fascio mm	Bobine mtr.
GT01-030	3	1 - 5	100
GT01-040	4	2 - 7	100
GT01-050	5	3 - 9	100
GT01-060	6	4 - 11	100
GT01-080	8	5 - 12	100
GT01-100	10	7 - 15	100
GT01-120	12	8 - 17	50
GT01-150	15	10 - 20	50
GT01-200	20	14 - 26	50
GT01-250	25	18 - 34	50
GT01-300	30	20 - 40	50
GT01-400	40	30 - 50	25
GT01-500	50	40 - 66	25



B= nero G= grigio

Composizione dei codici

**GT01-030-G**


CODICE BASE    DIAMETRO    COLORE



Autoestinguente

## GUAINA SPIRALATA

Polietilene, naturale o nero

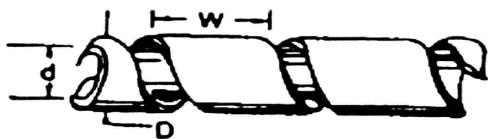

Codice	d mm	D mm	W mm	Avvolg. min-max (mm)	Bobine mtr.
GS01-040	5	6	7	4 - 50	10
GS01-060	7	8	10,8	6 - 60	10
GS01-080	8,5	10	11,4	7,5 - 60	10
GS01-090	10,2	12	13,9	9 - 65	10
GS01-120	13	15	15	12 - 70	10
GS01-150	16,4	19	18,2	15 - 100	10
GS01-200	21	24	19,6	20 - 130	10



B= nero N= naturale

Composizione dei codici

**GS01-040-N**

CODICE BASE    DIAMETRO    COLORE



Autoestinguente